



Ningbo Longlive was founded in 1980, covering an area of 30,000 square meters. We are specialized in manufacturing brass fittings and valves, exported to Europe, America, South America, Australia, Japan, Dubai, etc. There is the whole set of equipment of forging, stamping, casting, machining, polishing, plating, PVD and testing machines.

Since 2008 Longlive has been focusing on LEAD FREE products due to California State Law AB1953. We can produce



Spectrographic analysis



Roughness Comparison



Laser



Salt spray test



SPECIAL THREAD CMC MACHINE



Three coordinate measuring



Screw gauge



Hardness Tester



Thickness gauge



Vernier Caliper




Gauge

### LL-30001

#### BRASS BIBCOCK TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs & sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.6MPa, no leakage.

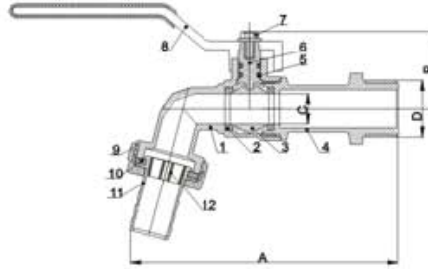

SIZE	A	B	C	D
1/2"	100	32	10	G1/2
3/4"	105	32	12	G3/4

NO.	Component	Material	Qty
1	Body	Brass	1
2	Seal	PTFE	2
3	Ball	Brass	1
4	Connector	Brass	1
5	O-ring	NBR	2
6	Stem	Brass	1
7	Nut	Fe	1
8	Handle	Fe(a235)	1
9	Screw cap	Brass	1
10	Gasket	NBR	1
11	Nozzle	Ss304	1
12	Core	Plastic	1



#### THE PERFECT QUALITY COMES FROM THE



LL-30002  
Size: 1/2" - 1"



LL-30003  
Size: 1/2" - 3/4"



LL-30004  
Size: 1/2" - 1"



LL-30005  
Size: 1/2" - 3/4"



LL-30006  
Size: 1/2"



LL-30007  
Size: 1/2" - 3/4"



LL-30008  
Size: 1/2"




LL-30009  
Size: 1/2"

### LL-30010

#### BRASS BIBCOCK TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease. remove all burrs sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.5MPA, no leakage.



SIZE	A	B	C	mm
1/2"	86	68	G1/2"	


NO.	Component	Material	Qty
1	Body	Brass	1
2	Gasket	NBR	1
3	Stem	Brass	1
4	Cap	Brass	1
5	Seal	PTFE	1
6	Press nut	Brass	1
7	Screw	Fe	1
8	Handle	Brass	2
9	Gasket	NBR	1
10	Mesh	ABS	1
11	Nozzle	Brass	1



### LL-30014

#### BRASS BIBCOCK TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease. remove all burrs sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.6MPA, no leakage.



SIZE	A	B	C	mm
1/2"	73	101	G1/2	
3/4"	73	101	G3/4	



NO.	Component	Material	Qty
1	Body	Brass	1
2	Nut	Fe(a235)	1
3	Nozzle	Brass	1
4	Gasket	NBR	1
5	Screw cap	Brass	1
6	Gasket	NBR	1
7	O-ring	NBR	1
8	O-ring	NBR	2
9	Stem	Brass	1
10	Handle	Brass	1
11	Cap	Brass	1
12	Plate	Brass	1



LL-30011

Size: 1/2" - 3/4"



LL-30012

Size: 1/2"



LL-30013

Size: 1/2"



LL-30015

Size: 1/2"



LL-30016

Size: 1/2"



LL-30017

Size: 1/2"