



Ningbo Longlive was founded in 1980, covering an area of 30,000 square meters. We are specialized in manufacturing brass fittings and valves, exported to Europe, America, South America, Australia, Japan, Dubai, etc. There is the whole set of equipment of forging, stamping, casting, machining, polishing, plating, PVD and testing machines.

Since 2008 Longlive has been focusing on LEAD FREE products due to California State Law AB1953. We can produce



Spectrographic analysis



Roughness Comparison



Laser



Salt spray test



SPECIAL THREAD CMC MACHINE



Three coordinate measuring



Screw gauge



Hardness Tester




Thickness gauge



Vernier Caliper



Gauge

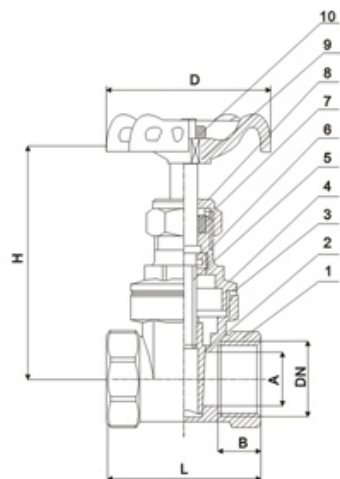

LL-60001

BRASS GATE VALVE TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.6MPa, no leakage.

NO.	Component	Material
1	Body	Brass
2	Bonnet	Brass
3	Gasket	Heat resisting fiber
4	Wedge	Brass
5	Stem	Brass
6	Screwed ring	Brass
7	Packing	PTFE
8	Packing nut	Brass
9	Handwheel	Steel
10	Nut	Steel

DN	A	B	L	H	D
1/2"	15	10	43	68	45
3/4"	19	11	47	78	50
1"	24	13	53	93	55
1-1/4"	32	14	57	108	60
1-1/2"	37	14	61	125	70
2"	47	16	67	143	80
2-1/2"	60	17	74	175	100
3"	72	19	86	205	100
4"	93	22	98	235	120



LL-60002

Brass Gate Valve
Size: 1/2" - 4"



LL-60003

Brass Gate Valve
Size: 1/2" - 4"



LL-60004

Brass Gate Valve
Size: 1/2" - 4"



LL-60005

Brass Gate Valve
Size: 1/2" - 4"



LL-60006

Brass Gate Valve
Size: 1/2" - 4"



LL-60007

Brass Gate Valve
Size: 1/2" - 4"



LL-60008

Brass Gate Valve
Size: 1/2" - 4"



LL-60009

Brass Gate Valve
Size: 1/2" - 4"